

TECHNICAL SPECIFICATIONS  
**HIAB L-HIPRO 235**





**BUILT TO PERFORM**



# HIAB L-HIPRO 235 BASIC DATA

TECHNICAL DATA	L-HIPRO 235 LL-2	L-HIPRO 235 LL-3
Max. lifting capacity (ft-lbs)	146 080	141 090
Outreach, hydraulic extensions (ft)	36' 5"	44' 11"
Outreach / lifting capacity (ft-lbs)	12' 2" - 11 900 19' 8" - 7 390 26' 11" - 5 290 34' 9" - 4 060 -	12' 6" - 11 240 19' 8" - 7 170 26' 11" - 4 980 35' 1" - 3 660 43' 4" - 2 910
Slewing angle (°)	410	410
Height in folded position (in)	93	93
Width in folded position (in)	100	100
Installation space needed (in)	37	37
Weight, "standard" crane without stabilizers (lbs)	4 540	4 960
Weight, stabilizer equipment (lbs)	600 - 940	600 - 940

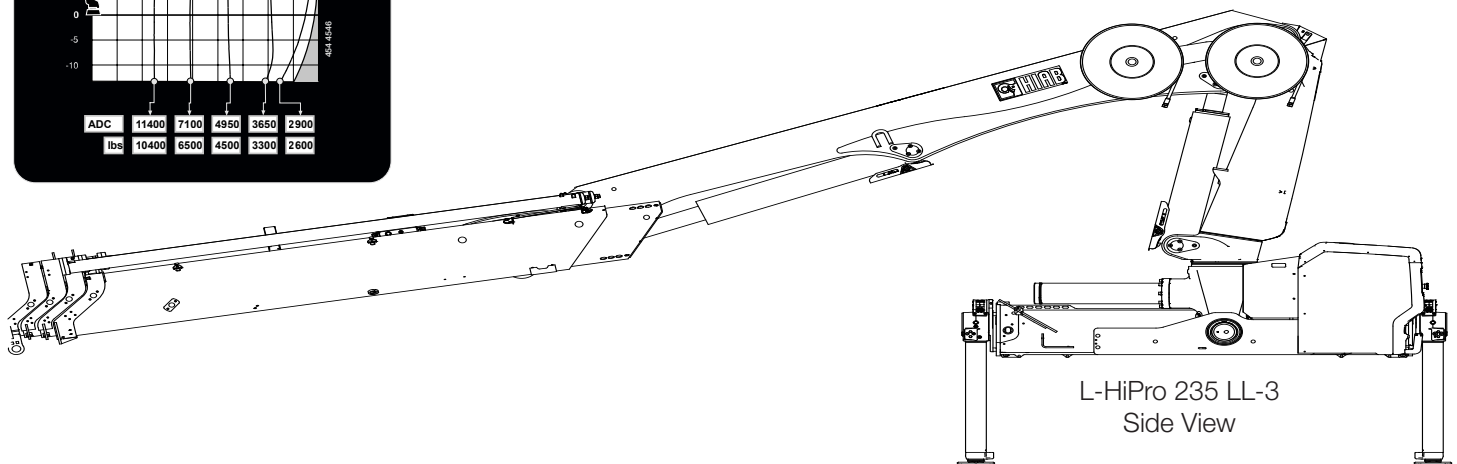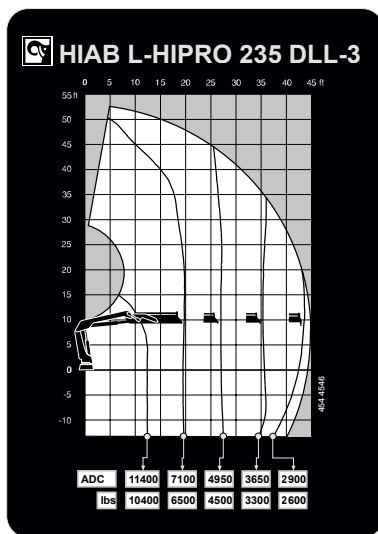

**Disclaimer.** Hiab cranes have been built to meet the highest standards of safety and service life and have been thoroughly tested. Strength calculations for this model have been carried out in accordance with EN13001 in fatigue class S2. Cargotec's certified Quality Assurance System complies with ISO 9001. Some of the items in our literature may be extra equipment. Certain applications may require an official permit. We reserve the right to change technical specifications without prior notice.

Hiab is the world's leading provider of on-road load handling equipment. Our high performance product range includes loader cranes, forestry and recycling cranes, demountables, truck mounted forklifts and tail lifts. We aim to set the industry benchmark for customer satisfaction by providing products and services that meet customer needs globally.

www.hiab.us.com  
Hiab is part of Cargotec.  
www.cargotec.com

Hiab USA Inc  
12233 Williams Road  
Perrysburg, OH 43551 USA  
tel. +419 482 6000  
fax. +419 482 6001

