

TECHNICAL SPECIFICATIONS
HIAB T-029




BUILT TO PERFORM



HIAB T-029 BASIC DATA

TECHNICAL DATA	T-DUO 029-4	T-HIDUO 029-4
Max. lifting capacity (ft-lbs)	19 900	19 900
Hydraulic outreach, standard	18' 4"	18' 4"
Hydraulic boom extension	13' 1"	13' 1"
Lifting height above installation level	21' 0"	21' 0"
Outreach / lifting capacity (ft-lbs)	5' 3" - 3 660 8' 2" - 2 250 11' 6" - 1 590 14' 9" - 1 190 18' 1" - 970	5' 3" - 3 660 8' 2" - 2 250 11' 6" - 1 590 14' 9" - 1 190 18' 1" - 970
Rec. oil flow (gal/min)	1 - 3	1 - 3
Working pressure (psi)	2 680	2 680
Slewing angle (°)	330	330
Height in folded position (in)	63	63
Width in folded position (in)	25	25
Installation space needed (in)	13	13
Weight, "standard" crane without stabilizers (lbs)	750	750
Weight, stabilizer equipment (lbs)	60 - 260	60 - 260

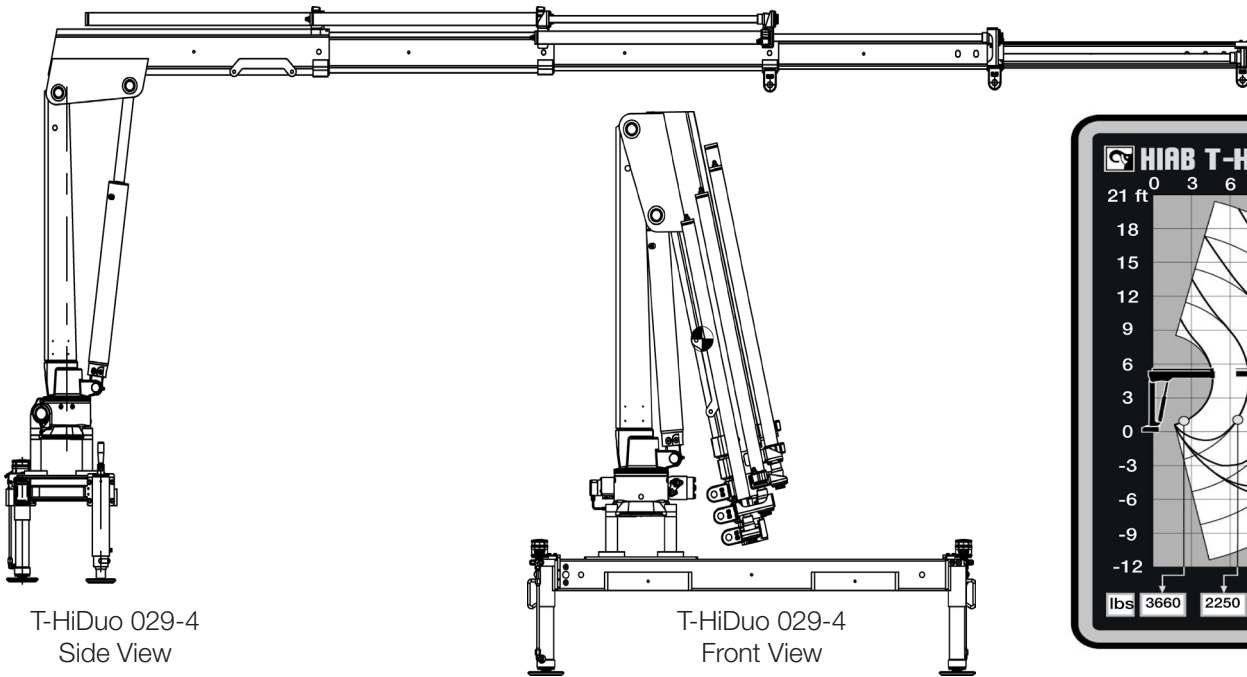

T-HiDuo 029-4
Side View

T-HiDuo 029-4
Front View

Disclaimer. Hiab cranes have been built to meet the highest standards of safety and service life and have been thoroughly tested. Strength calculations for this model have been carried out in accordance with EN13001 in fatigue class S2. Cargotec's certified Quality Assurance System complies with ISO 9001. Some of the items in our literature may be extra equipment. Certain applications may require an official permit. We reserve the right to change technical specifications without prior notice. Hiab cranes produced for EU-countries are CE marked and comply with the European Standard EN12999.

Hiab is the world's leading provider of on-road load handling equipment. Our high performance product range includes loader cranes, forestry and recycling cranes, demountables, truck mounted forklifts and tail lifts. We aim to set the industry benchmark for customer satisfaction by providing products and services that meet customer needs globally.

www.hiab.us.com
Hiab is part of Cargotec.
www.cargotec.com

Hiab USA Inc
12233 Williams Road
Perrysburg, OH 43551 USA
tel. +419 482 6000
fax. +419 482 6001

